(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 29 December 2004 (29.12.2004)

(10) International Publication Number WO 2004/112537 A1

(51) International Patent Classification7: 15/00, A47L 17/00

A46B 13/08,

(74) Agent: BAE, Tae Young; Room No. 301, Ssangma Bldg., 828-23, Yeoksam-dong, Kangnam-ku, Seoul 135-080 (KR).

(21) International Application Number:

PCT/KR2004/001392

(22) International Filing Date: 11 June 2004 (11.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10-2003-0040200

20 June 2003 (20.06.2003)


(71) Applicant and

(72) Inventor: KIM, Jung Hoa [KR/KR]; 101-702, DongA Green Aprtment, Sungsulga-dong, Sungdong-ku, Seoul 133-110 (KR).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: WASHING BRUSH

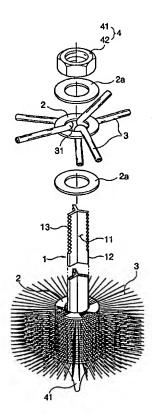

(57) Abstract: The present invention is directed to a washing brush in which a core for hising-washing threads can keep a straight shape thereof rigidly and the threads are fixed to the core uniformly, densely, and rigidly, so that it can be properly applied to an automatic washing device and also prevent the threads from being separated from the core. The present invention provides the washing brush comprising a core having a recess formed at a circumference thereof along an axial direction with a predetermined distance, and a wing formed between the recesses; a plurality of fixing rings surrounding the circumference of the core; washing threads bent at a middle portion thereof, wherein bent portions thereof are caught at each fixing ring and are inserted in the recess; and a fixing means provided to the core and making the rings in close contact with each other.